

# The removal of thermo-tolerant coliform bacteria by immobilized waste stabilization pond algae.

H.W.Pearson<sup>1</sup>, A. E. Marcon<sup>2</sup> and H.N. Melo<sup>3</sup>

1.Environmental Sanitation Group, Department of Chemistry, State University of Paraiba, Campina Grande, PB, Brazil.

2.Center of Health Sciences, Federal University of Rio Grande do Norte, Natal, RN, Brazil.

3. Dept. of Chemical Engineering, Federal University of Rio Grande do Norte, Natal, RN, Brazil.



# Introduction

- The use of immobilized micro-algal systems for the industrial production of metabolites, the removal of nutrients, metals and organic pollutants from aqueous systems, measurements of toxicity have been recently reviewed by Morreno-Garrido (2008).
- In the context of wastewater treatment applications studies with immobilized algal systems have tended to concentrate on nutrient and metal removal and co-immobilized systems of algae and bacteria have also been studied (Megharaj et al., 1992; Hoffman, 1998; Tam et al., 2000; Bashan et al., 2002).

- The advantage of the use of waste stabilization ponds and high rate pond systems to treat domestic and industrial wastewaters over electro-mechanical processes has been their ability to produce effluents of good microbiological quality suitable for effluent re-use without the need for additional disinfection.
- Pond disinfection processes and the role of micro algae have been extensively and recently reviewed by Davies-Colley (2005).
- However, little attention has been paid to the potential use of immobilized algal systems for effluent disinfection.

# Aim

- In the present study the use of immobilized *Chlorella* to disinfect wastewater effluents was investigated using thermo-tolerant coliforms (TTC) as a bacterial model.
- An attempt was also made to determine the factors affecting the bacterial die-off process by this species of *Chlorella* (originally isolated from a tropical maturation pond), when immobilized in calcium alginate beads.

# Methods

- The *Chlorella* species was originally isolated from the Ponta Negra WSP, Natal, RN, Brazil.
- Thermotolerant coliforms (TTC) were also initially isolated from the same WSP complex.

# Algal culture

- Uni-algal pond isolates of *Chlorella* were cultured aseptically in 2L Erlenmeyer flasks containing 500ml of Bold's media (Borowitzka, 1988).
- The cultures were grown under continuous white fluorescent light (40W) giving a light intensity of approximately  $85\mu\text{m}\cdot\text{s}^{-1}\cdot\text{m}^{-2}$ .
- The ambient temperature was  $28 \pm 3^\circ\text{C}$  and the flasks were shaken manually every 8h.
- The algal cells were harvested by centrifugation (3000g for 10min) after 15 days growth for subsequent immobilization in alginate beads.

# Thermo-tolerant coliforms (TTC)


- The TTC colonies were isolated from the same maturation pond effluent as the algae using the membrane method (APHA 1998).
- Subsequently a TTC inoculum incorporating several membrane colonies was grown in TTC liquid medium (Difco) at 44°C for 24h.
- One ml of the concentrated broth culture was diluted in 100ml of sterile distilled water (pH adjusted to 7.0) to give a final TTC concentration of approximately  $10^{11}$  cells  $100\text{ml}^{-1}$ .
- This suspension was used to study TTC die-off in the immobilized *Chlorella* columns.
- TTC samples taken from the immobilized algae and control columns were analyzed using the same membrane method.


# Algal immobilization in alginate:


- The washed centrifuged pellet of cultured *Chlorella* cells was re-suspended in sterile distilled water (pH 7.0) to give a cell concentration of approximately  $7 \times 10^7$  cells ml<sup>-1</sup>.
- The algal suspension was mixed 1:1 with 4% autoclaved sodium alginate solution and mixed using a rotary mixer.
- The final 2% mixture of sodium alginate containing the *Chlorella* cells was placed in a burette and added drop-wise into a stirred solution of 0.4M CaCl<sub>2</sub> producing beads of immobilized *Chlorella* in a matrix of calcium alginate.
- Bead size was approximately 4mm in diameter. Each bead contained approximately  $10^6$  algal cells and the chlorophyll *a* concentration was approximately 3.6µg chl *a* bead<sup>-1</sup> as estimated by methanol extraction (APHA 1998).
- 
- The alginate control beads without *Chlorella* were prepared similarly except the 4% sodium alginate solution was initially mixed with distilled water (Megharaj *et al.*, 1992; Tam and Wong, 2000).

# Bioreactors

- The columns of immobilized algae were prepared by filling 100ml burettes with the immobilized algal beads or control beads suspended in distilled water to prevent the formation of air bubbles between the beads.
- Immediately prior to experimentation the columns were eluted with the TTC suspension to replace the distilled water.
- These simple reactors were operated under batch conditions and samples of the TTC suspension removed at different time intervals.

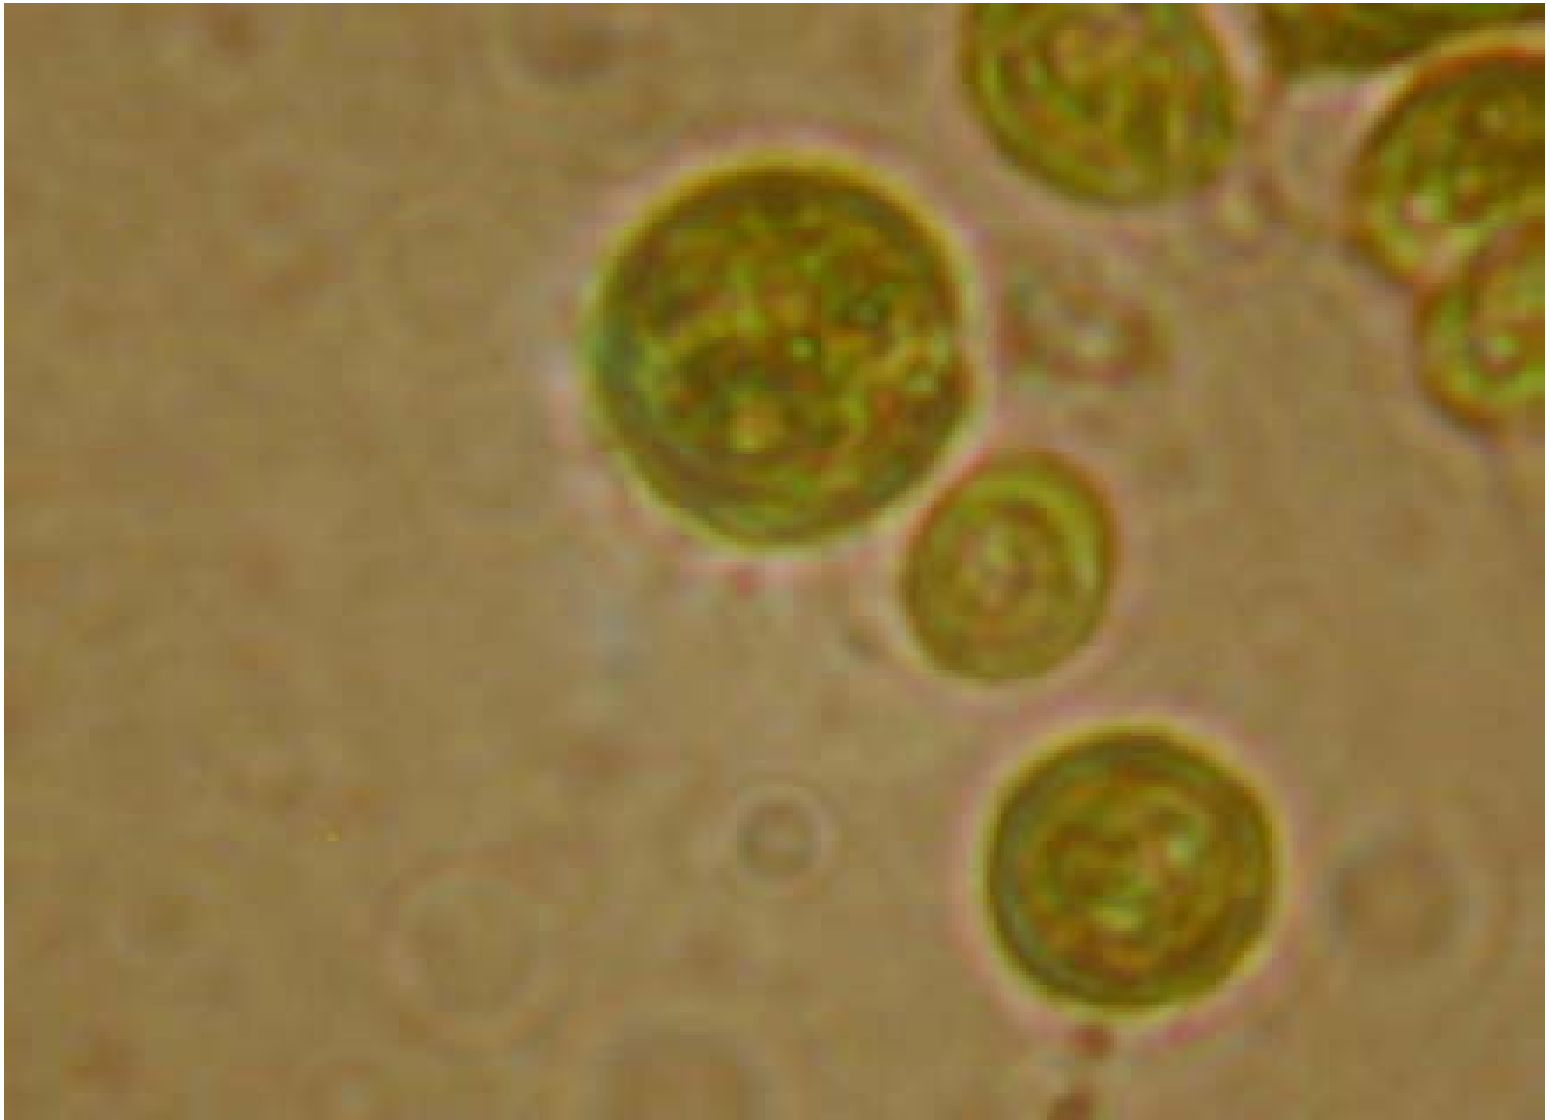

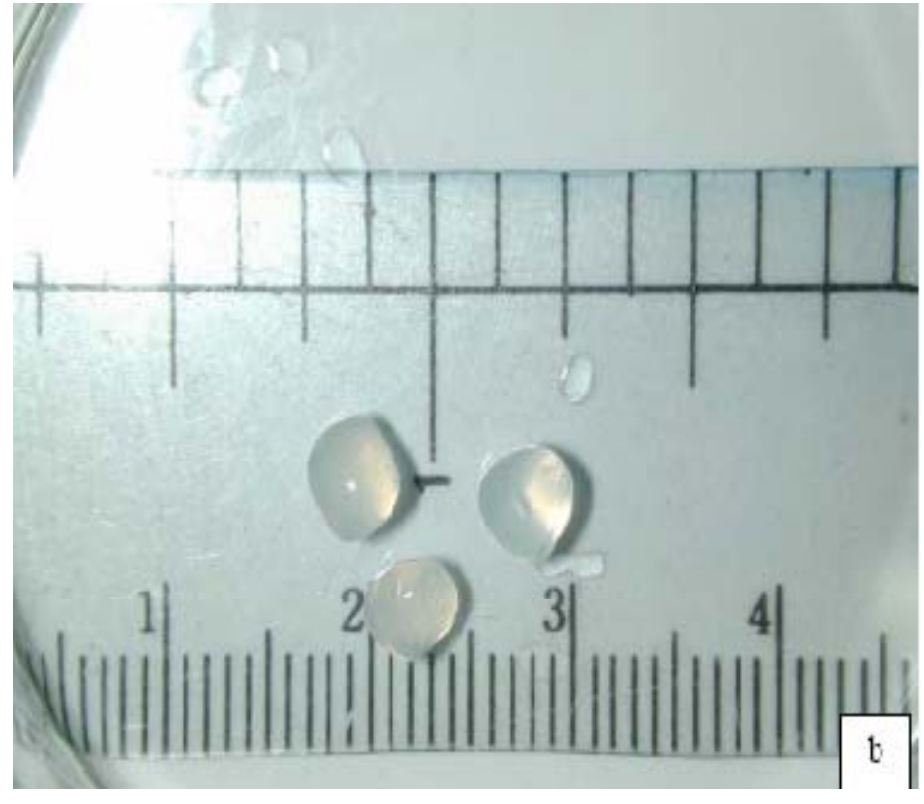


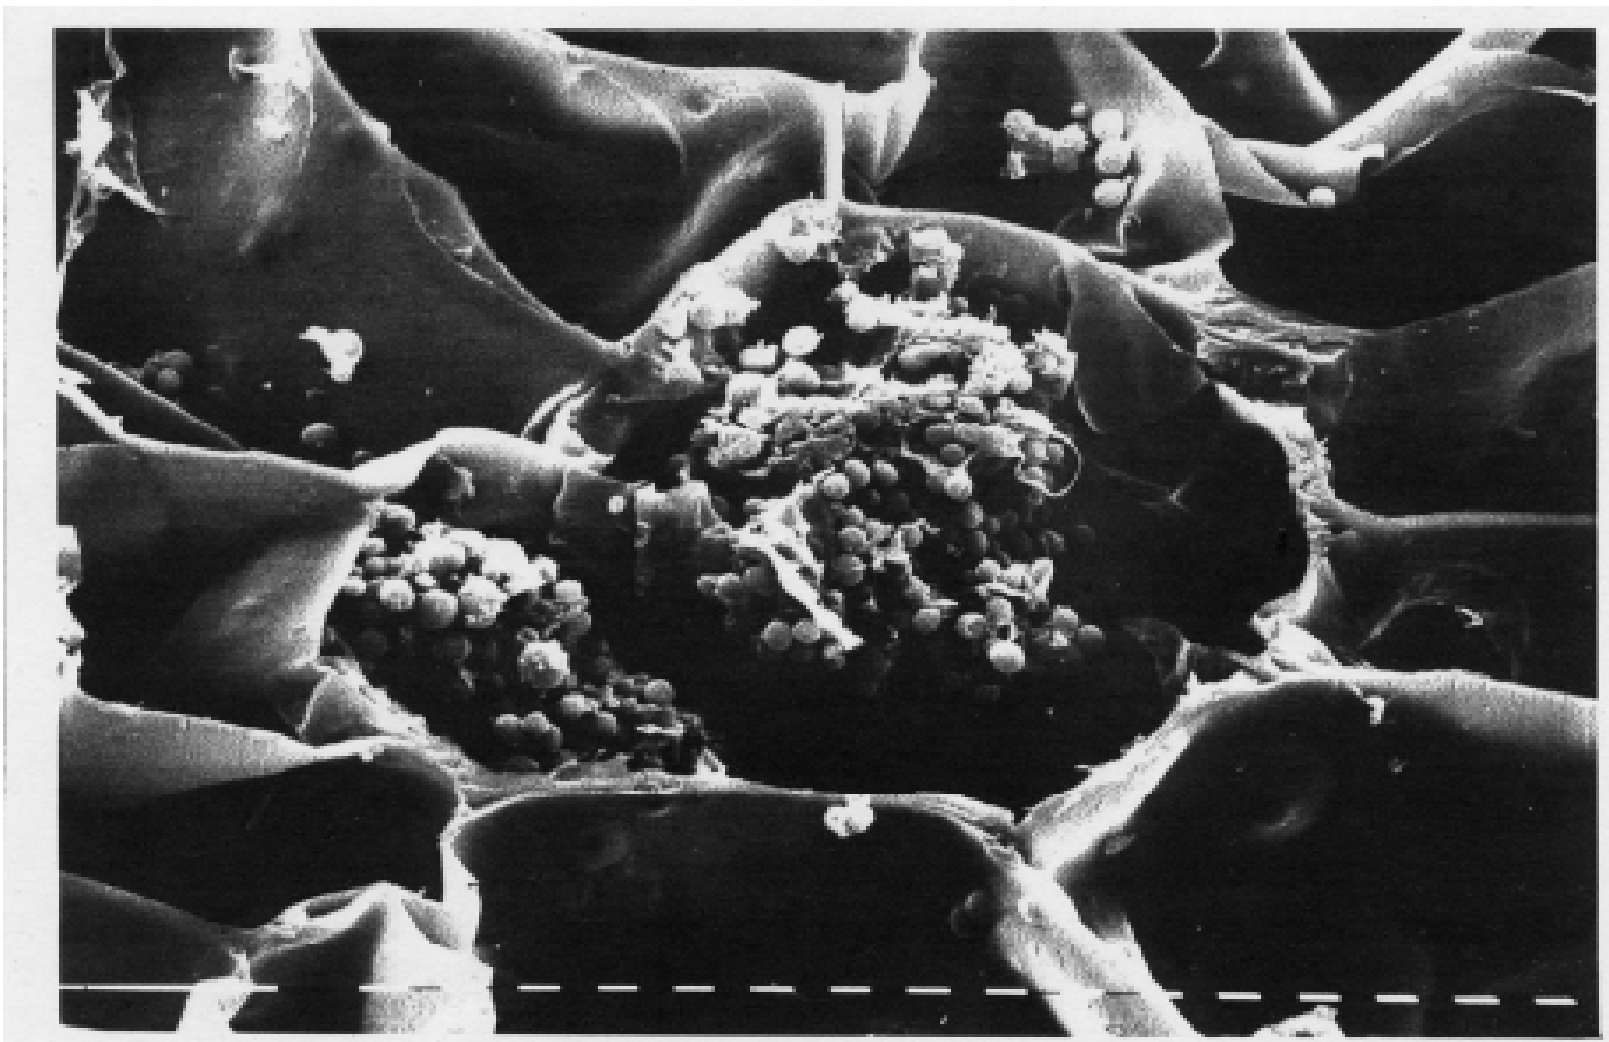

Scanning Electron Micrograph of Chlorella cells immobilised in a matrix of calcium alginate




- The glass column containing beads of immobilized *Chlorella* cells and the control column filled with alginate beads but without algae were eluted with a mixed culture of thermo-tolerant coliforms (TTC) re-suspended in ringers solution to displace any algal culture medium before....
- finally filling and leaving to incubate in fluorescent white light (approx.  $85 \mu\text{mols s}^{-1}.\text{m}^{-2}$ ) for 24h.
- The ambient air and column effluent temperatures varied between 27.5 and 30.5°C and 28-29.5°C respectively.
- Samples of column effluents were removed after 0.05h, 3h and thereafter every three hours and analyzed for TTC.

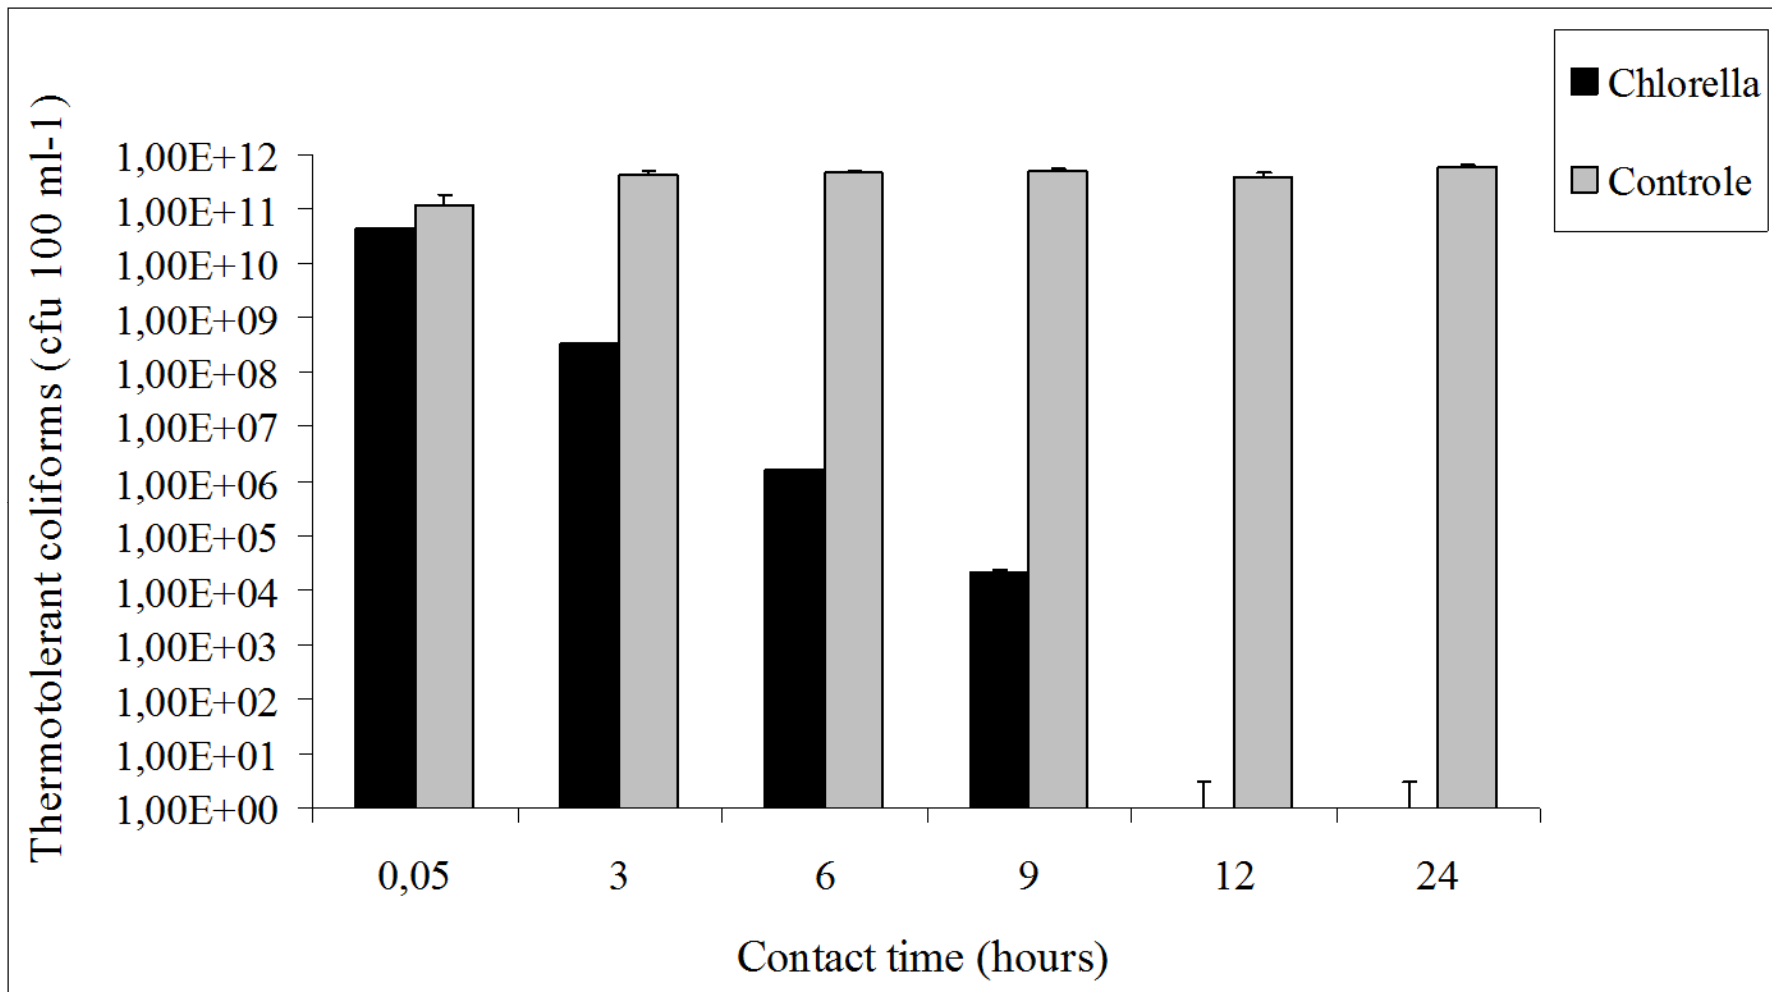

**Thermo tolerant coliforms (TTC) removal with time by columns of immobilized Chlorella cells incubated in artificial light. The controls were columns of alginate beads without immobilized algae. The values are the means of triplicates from six different experiments. The maximum standard deviation values ( $\top$ ), for  $p \leq 0.05$ . The age of the immobilized algal beads varied between 10 and 40 days.**

- Removal of TTC only occurred in the columns with immobilized *Chlorella* cells and in comparison with TTC removal rates in maturation ponds the process was rapid.
- 5 to 6 log removal of TTC in 6h and complete removal (>11 logs) in less than 12h.
- When the same experiments were repeated with immobilized algal beads that had been prepared 63 to 72 days previously the results were similar to those with the younger algal beads.

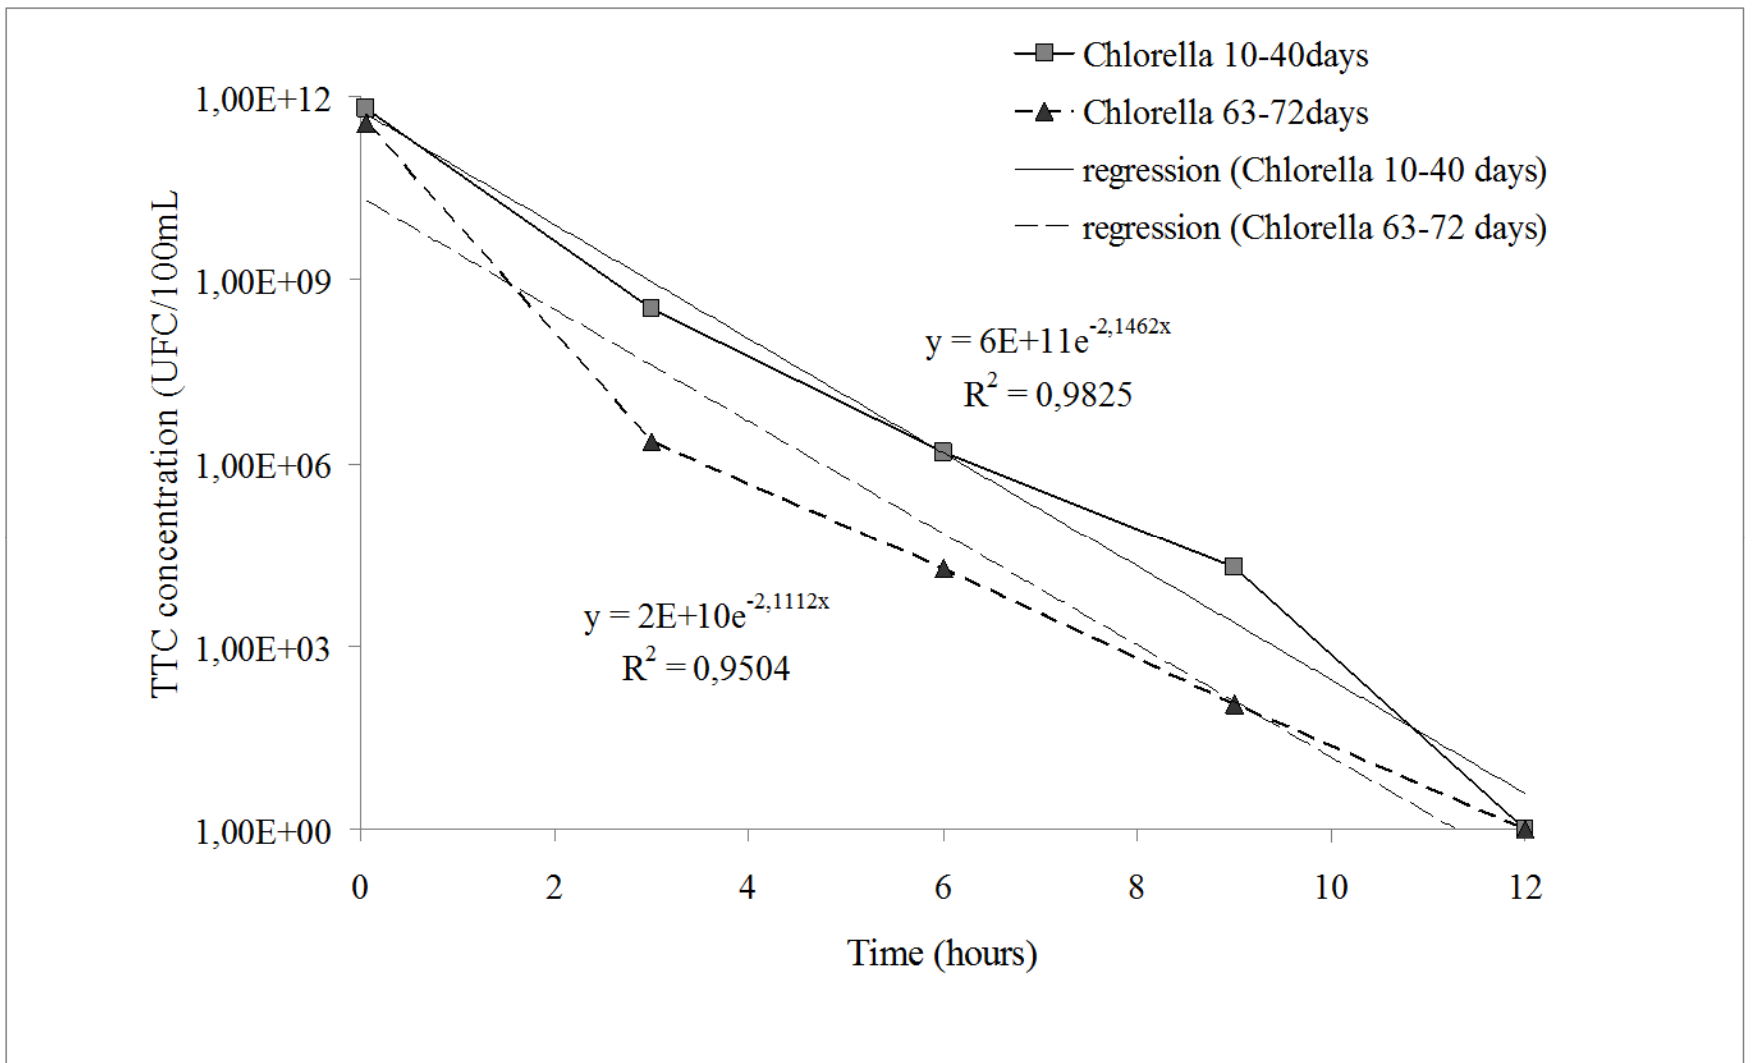

**Thermo-tolerant coliforms (TTC) removal by columns of Chlorella cells immobilized for 10 to 40 days and 63 to 72 days when incubated under artificial illumination. Values are the means of triplicates from 6 experiments for each age group of the algal beads.**

- These data suggest that these immobilized algal systems could have a prolonged active life span in terms of TTC removal.
- Indeed Chen (2001), demonstrated that stored *Scenedesmus* cells immobilized in alginate remained viable for over two years and
- Megharaj *et al* (1992) demonstrated algal growth within the alginate beads.

- In another series of experiments the immobilized columns of *Chlorella* were exposed to shaded natural light with the intensity varying between 604 and 906  $\mu\text{mols.m}^{-2} \text{s}^{-1}$ .
- However in this case the control columns also contained immobilized algal beads but the columns were incubated in the dark by enclosing them in aluminium foil.
- The maximum exposure period was six hours so as to utilise a period of relatively even light intensity between 10.00 and 16.00.

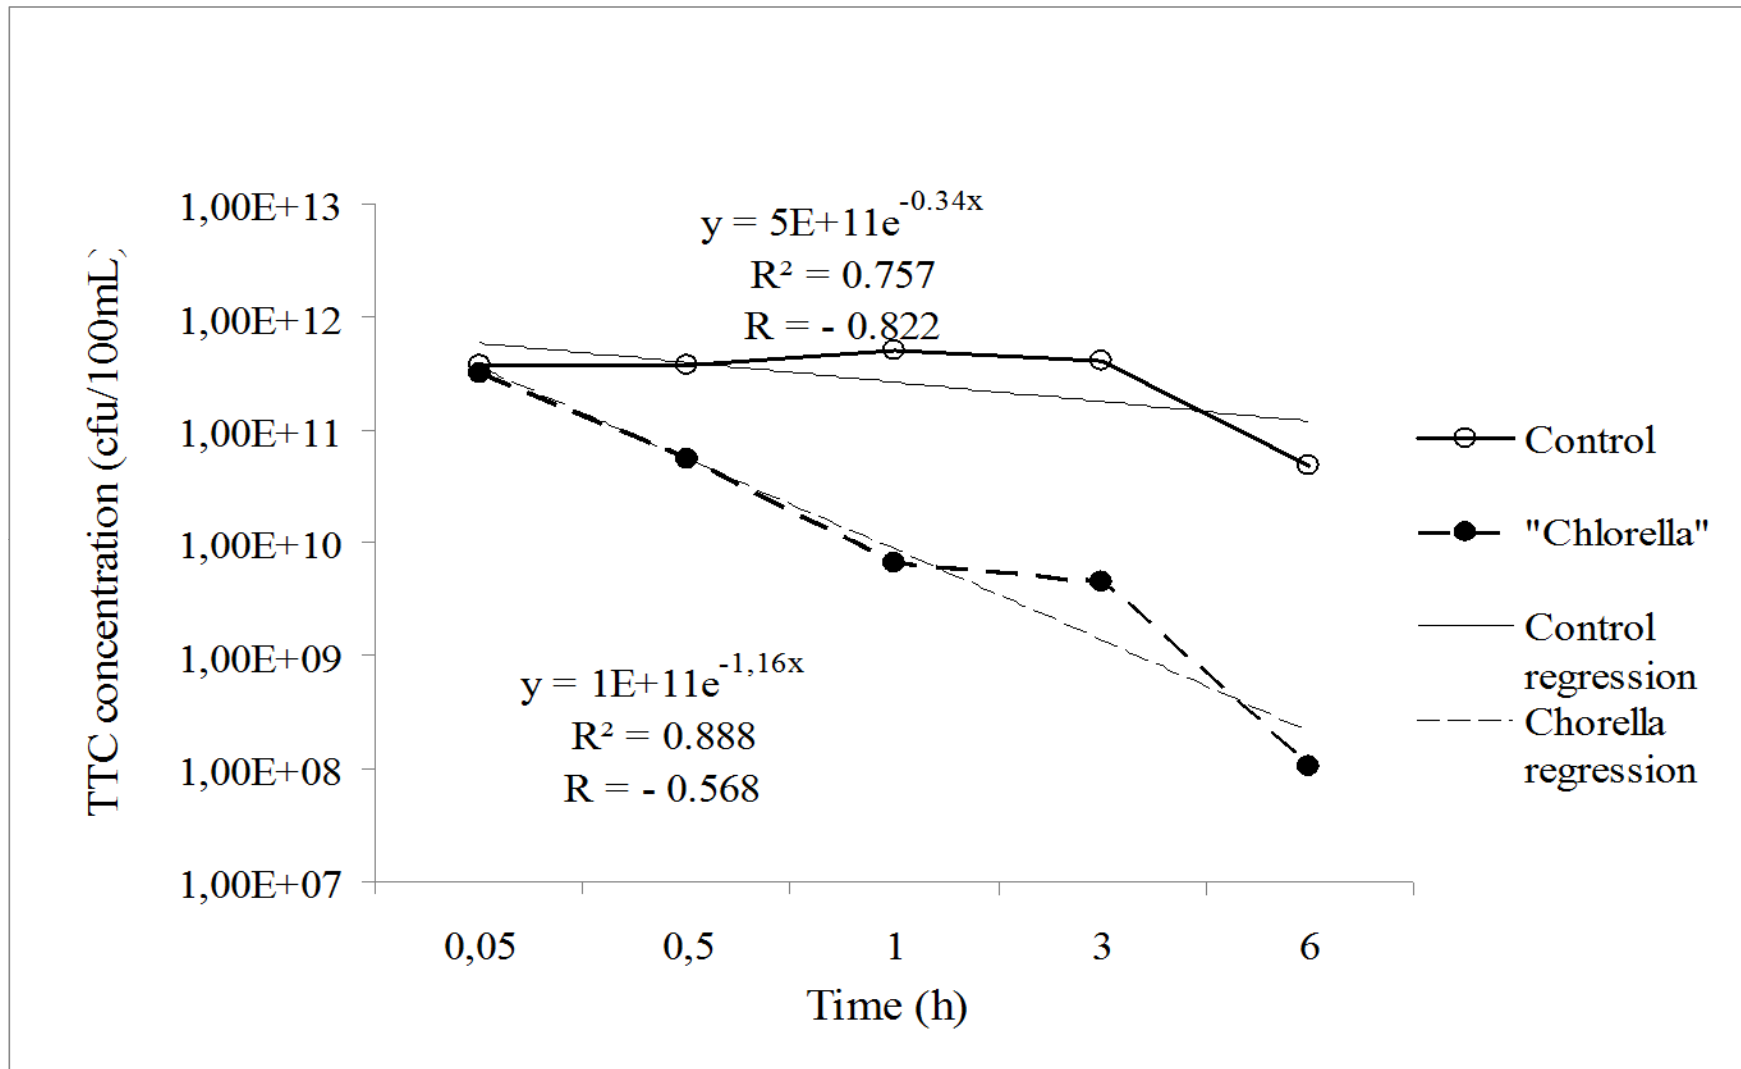


Figure 3. TTC removal by columns of immobilized Chlorella cells under natural light conditions. The controls were columns of immobilized algae kept in the dark by encapsulation in aluminium foil to exclude light.

- The mean effluent temperatures were 27 to 34.5°C for the algal columns in the light and 28.5 to 30°C for the columns in the dark.
- These values were a little higher than in the experiments under artificial light
- but statistically there was no difference in the rates of TTC die-off between columns incubated in shaded sunlight and the previous studies using low intensity fluorescent light.
- Nevertheless algae plus light were necessary for efficient TTC die-off since little die-off occurred in the immobilized algal columns incubated in the dark or in the columns of alginate beads *without* algae incubated in the light.

- The lack of apparent TTC decay in the light controls comprising alginate beads without immobilized algae in artificial light and
- with TTC suspensions in Ringers solution incubated under the shaded sunlight conditions for 12 hours (data not shown)
- could be due to the relatively low light intensities used in these experiments.

pH values were also measured in the effluents of immobilized *Chlorella* columns at the time of TTC sampling.

<b>Contact time (h)</b>	<b>Chlorella light</b>	<b>pH</b>	<b>Controls</b>
<b>0,05</b>	<b>7.23 (<math>\pm 0.1</math>)</b>		<b>7.35 (<math>\pm 0.2</math>)</b>
<b>0,5</b>	<b>7.25 (<math>\pm 0.5</math>)</b>		<b>7.20 (<math>\pm 0.3</math>)</b>
<b>1</b>	<b>7.73 (<math>\pm 0.3</math>)</b>		<b>7.15 (<math>\pm 0,2</math>)</b>
<b>3</b>	<b>8.35 (<math>\pm 0.2</math>)</b>		<b>7.41 (<math>\pm 0.3</math>)</b>
<b>6</b>	<b>8.33 (<math>\pm 0.1</math>)</b>		<b>7.22 (<math>\pm 0.2</math>)</b>
<b>9</b>	<b>8.59 (<math>\pm 0.4</math>)</b>		<b>7.57 (<math>\pm 0.1</math>)</b>
<b>12</b>	<b>8.90( <math>\pm 0.3</math>)</b>		<b>7.75 (<math>\pm 0.4</math>)</b>

The results for both light regimes have been combined.

The control values are a combination of results for columns of alginate beads without algae incubated in the light and columns of immobilized algae incubated in the dark.

- There was a steady increase in effluent pH with time of light exposure in the immobilized algal columns reaching a value of pH 8.3 after 6 hours and pH 8.9 within 12 hours.
- In contrast the pH varied little in the light and dark controls over the same period.
- This might be expected since an increase in pH can be attributed to the photosynthetic activity of the algae immobilized in the alginate beads.
- The polysaccharide matrix of the alginate beads is known to be permeable to liquids and gases (Moreno-Garrido; 2008).
- Samples of immobilized algal beads suspended in culture medium also demonstrated oxygen evolution in the light when placed in the well of a Clarke-type oxygen electrode (data not shown).

- There is considerable controversy and differences of opinion as to the hydraulic flow regimes predominating in ponds of different geometries and of the impact of pond geometry on pond performance (Pearson et al., 1995; Shilton and Sweeney, 2005).
- In this study the values for the first order rate constant for TTC removal ( $K_b \text{ d}^{-1}$ ), were calculated assuming plug flow in the algal columns using the equation of von Sperling (1999) when comparing the performance of Brazilian maturation ponds.
- When the results of this study were plotted against pH there was a positive linear correlation between  $K_b$  and increasing pH

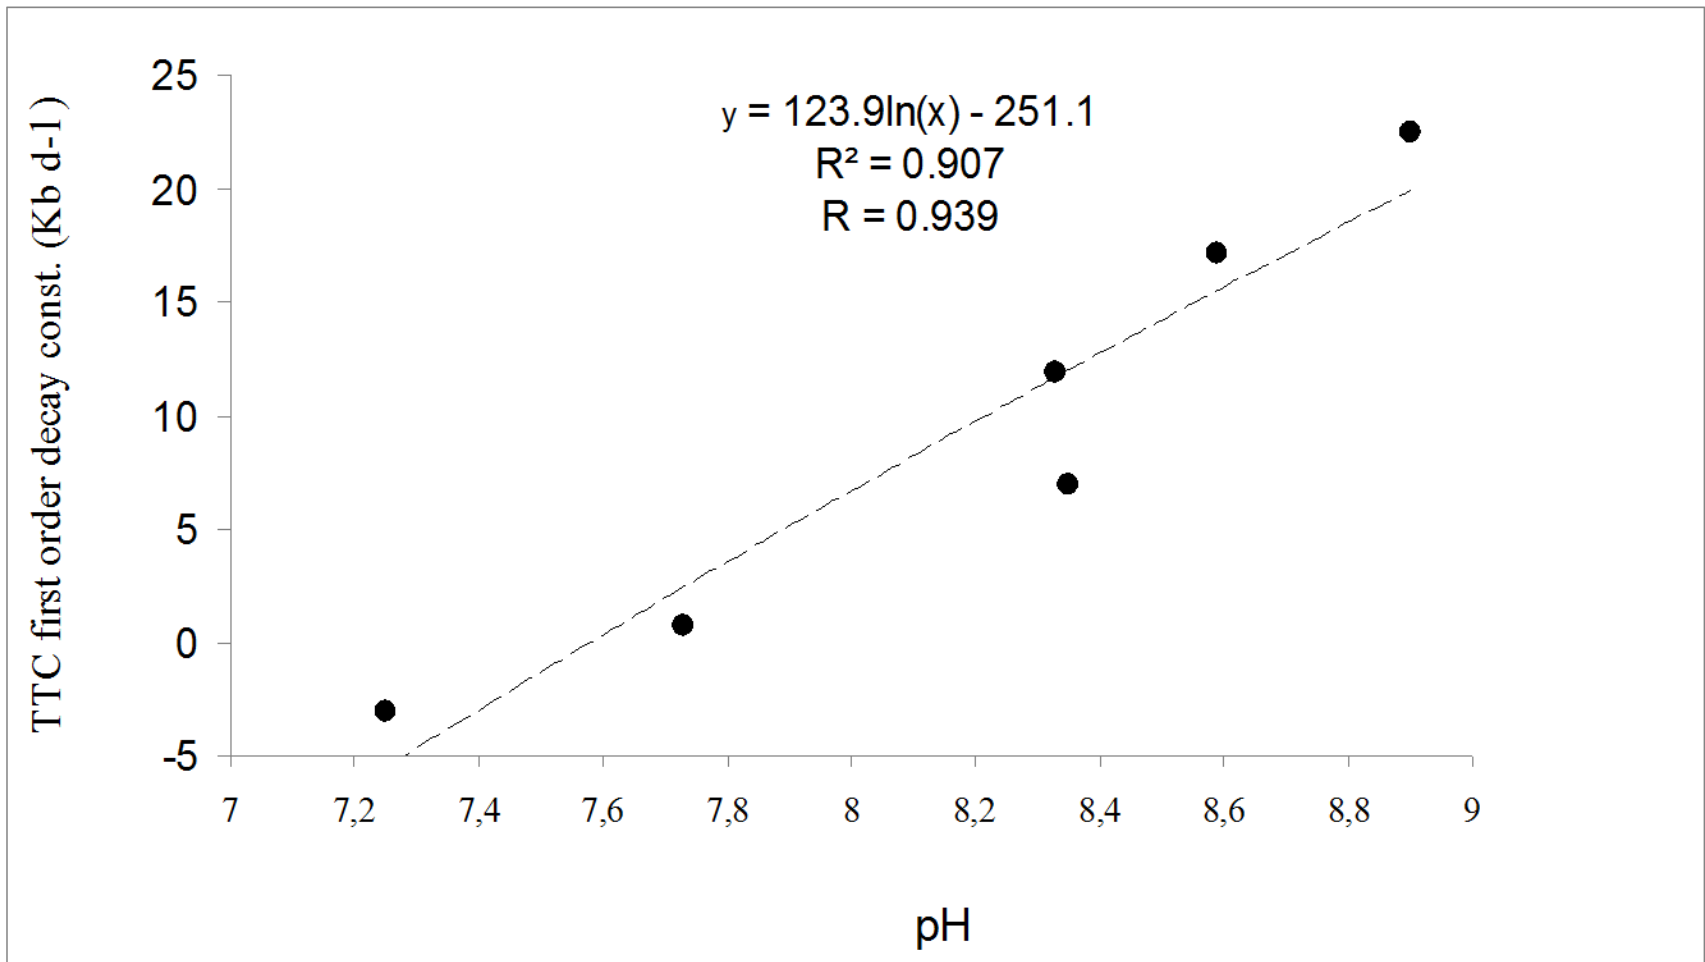


Figure 4. The relationship between TTC first order decay constants (Kb d-1) and pH in effluent samples from the immobilized algal columns incubated in artificial light. The values are the means of triplicates analyses from six experiments.

It would seem that the key factors controlling the rate of TTC in maturation ponds namely elevated pH and light linked to algal photosynthesis are relevant in the immobilized algal system but the system is clearly more efficient.

- Cellular immobilization technology is easy to apply and in the case of algae they can be isolated, cultured and immobilized on-site at any waste stabilization pond system or cultures obtained from algal culture collections.
- However, Jiménez-Pérez et al. (2004) found that N and P removal rates by immobilized green microalgae isolated from piggery manure were markedly higher than when commercially available algal isolates were used.
- They suggested that species that naturally develop in wastewater, which are well adapted to the temperature and chemical changes in the medium, would show higher efficiencies than commercially available ones.

- In on going studies we are investigating the efficiency of other common waste stabilization pond algae and cyanobacteria in continuous flow columns in pilot scale (2 m high and 2.5 cm in diameter), for disinfection.
- These studies also consider virus, protozoa and helminth egg removal and look at the efficacy of combining pathogen removal with nutrient removal from various secondary treated effluents.

# Conclusions

1. Columns of *Chlorella* cells immobilized in alginate beads removed 5 log concentrations of TTC in 6h and 11 logs in 12h.
2. Algal beads that had been immobilized for 72 days continued to function efficiently in non-sterile conditions.
3. The rate of TTC removal appeared to be the same when the immobilized algal columns were incubated in artificial light as in shaded sunlight conditions.
4. Both light and the presence of algae were necessary for TTC removal since very little die-off occurred in the control columns containing alginate beads without algae present when incubated in the light and when the columns containing algae were incubated in the dark.

# Conclusions (cont).

5. There was a positive correlation between the first order rate constant for TTC die-off ( $K_b \text{ d}^{-1}$ ) and increasing pH in the effluents from the immobilized algal columns in the light.
6. Immobilized algal technology using algal isolates from waste stabilization ponds warrants further investigation at pilot scale, possibly as a combined disinfection and nutrient removal technology for secondary wastewater effluents.
7. The system could operate continuously combining artificial light periods with sunlight so as to operate continuously over a 24h cycle.

# ACKNOWLEDGEMENTS

- The authors wish to thank FINEP/PROSAB and FAPESQ-PB for financial support for this research in terms of capital and consumable costs.
- CNPq for a scholarship to HWP.

This work is dedicated to the memory of Professor Salomão Anselmo Silva who died recently and who made a significant contribution to waste stabilization research over the last 30 years.